

The EK Liquid Line Filter Drier is a premium compacted bead Filter Drier with a 20 micron outlet pad for maximum filtration. The EK is a premium universal replacement liquid line Filter Drier for CFC, HCFC and HFC refrigerants including R-12, R-134a, R-22, R-404A, R-407C, R-410A, R-500, R-502, and R-507.



Features

- Filtration first for more effective use of surface area of desiccant
- High moisture and acid removal capacity
- Solid copper connections
- Corrosion resistant epoxy powder paint finish
- Approved for POE oils with Copeland™ compressors
- Shock resistant steel shell construction



Specifications

- Desiccant blend - optimized for high water capacity and acid capacity
- Filtration: 20 microns
- Maximum working pressure: 680 psig
- UL/CUL file number: SA 3124

Nomenclature example: EK-083S

EK	08	3	S
Drier Series	Unit Size (in cu. in.)	Connection Size (in 1/8")	S = ODF connections (omit for SAE)

Dimensional Data

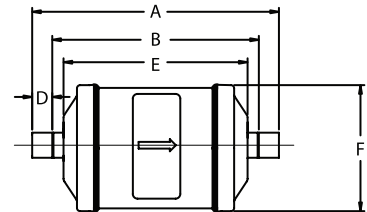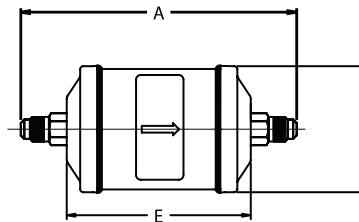

Ordering Information

PCN	Description	Dimensions (in)				Weight (lbs)
		A	B	D	F	
060009	EK 032	4.38				
060012	EK 032S	3.83	2.71	0.56		
060011	EK 032FM	3.92				
060010	EK 032MF	3.92			2.57	1.75
060013	EK 033	4.69				
060014	EK 033S	4.03	2.79	0.62		
047601	EK 052	4.83				
057013	EK 052MF	4.37			3.02	
063978	EK 0525S	4.20	3.56	0.32	3.02	
047602	EK 052S	4.15	3.46	0.35		
047603	EK 053	5.14			3.02	
047604	EK 053S	4.48	3.24	0.62		
047605	EK 082	5.64				
047606	EK 082S	4.96	4.27	0.35		
049551	EK 0825S	5.01	4.37	0.32		
056906	EK 083MF	5.70			3.83	
047607	EK 083	5.95			3.83	
047608	EK 083S	5.29	4.05	0.62	3.83	
047609	EK 084	6.17				2.64
047610	EK 084S	5.33	4.07	0.63		
047611	EK162	6.58				
047612	EK 162S	5.90	5.21	0.35		
056045	EK 1625S	5.95	5.31	0.32		
047613	EK 163	6.89				
047614	EK 163S	6.24	5.43	0.40		
047615	EK 164	7.11			4.77	
047616	EK 164S	6.33	5.33	0.50		
047617	EK 165	7.57				
047618	EK 165S	6.55	5.30	0.63		
047619	EK 167S	7.13	5.63	0.75		
048210	EK 303	9.66				
048211	EK 303S	9.01	8.21	0.40		
048212	EK 304	9.88				
048213	EK 304S	9.10	8.10	0.50		
048214	EK 305	10.34			7.54	3.14
048215	EK 305S	9.32	8.07	0.63		
048216	EK 306S	9.73	8.48	0.63		
048217	EK 307S	9.90	8.40	0.75		
048218	EK 309S	10.26	8.45	0.90		
048219	EK 413	9.79				
048220	EK 414	10.01				
048221	EK 414S	9.23	8.23	0.50		
048222	EK 415	10.47			7.67	
048223	EK 415S	9.45	8.20	0.63		3.64
048224	EK 417S	10.03	8.53	0.75		
048225	EK 419S	10.39	8.58	0.91		
048228	EK 757S	15.25	14.02	0.61		
048229	EK 759S	15.88	14.07	0.91	13.16	6.14

EK Contractor's Choice Filter Drier

R-410A

System Protectors

The EK Contractor's Choice filter drier is designed for foodservice and residential air conditioning applications.

Features

- Extended solid copper connections
- Dual access valves for faster and easier system diagnosis
- Incorporates all the internal features of the premium EK

Specifications

- Desiccant blend - optimized for high water capacity and acid capacity
- Filtration: 20 microns
- Maximum working pressure: 680 psig
- UL/CUL file number: SA 3124



Ordering Information

PCN	Description
063908	EK 032S VV
065966	EK 052S VV
065963	EK 053S VV
065964	EK 083S VV
065965	EK 163S VV

EK Cap Tube Filter Drier

R-410A

The EK Cap Tube filter drier is designed for foodservice refrigeration systems.

Features

- Schrader valve on the inlet side acts as a maintenance and charging port
- Outlet is designed to accept capillary tubing without the need for crimping
- Extended solid copper 1/4 ODF connection inlet by cap tube
- Incorporates all the internal features of the premium EK

Specifications

- Desiccant blend - optimized for high water capacity and acid capacity
- Filtration: 20 microns
- Maximum working pressure: 680 psig
- UL/CUL file number: SA 3124



Ordering Information

PCN	Description
063208	EK 032 SV CAP (3 cubic inch)
065846	EK 052 SV CAP (5 cubic inch)

Capacity Tables

Description	Connections Inlet/Outlet	Flow Capacity Tons @ 1 psi ΔP ^{1,4} (For kW, multiply tons by 3.5)						Water Capacity ² Drops of Water ³																							
		R-12		R-134a		R-22/R-410A		R-407C		R-404A/R-507		R-744		R-12		R-134a		R-22		R-407C		R-410A		R-404A/507		R-502		R-744			
		75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F		
EK 03 2 FM	1/4 Fem/1/4 Male SAE	1.6	2.0	2.2	2.1	1.4	2.8	47	41	40	37	40	33	33	25	21	19	38	37	42	37	30	34								
EK 03 2 MF	1/4 Male/1/4 Fem SAE	1.6	2.0	2.2	2.1	1.4	2.8																								
EK 03 2	1/4 SAE	1.6	2.0	2.2	2.1	1.4	2.8																								
EK 03 2 S	1/4 ODF	2.2	2.7	2.9	2.9	2.0	3.7																								
EK 032 SV	1/4 ODF	2.2	2.7	2.9	2.9	2.0	3.7																								
EK 03 3	3/8 SAE	2.5	3.0	3.3	3.2	2.2	4.3																								
EK 03 3 S	3/8 ODF	2.5	3.0	3.3	3.2	2.2	4.3																								
EK 05 2 FM	1/4 Fem/1/4 Male SAE	1.7	2.1	2.3	2.2	1.5	3.0	133	119	116	106	114	97	95	75	64	58	109	106	120	107	81	89								
EK 05 2 MF	1/4 Male/1/4 Fem SAE	1.7	2.1	2.3	2.2	1.5	3.0																								
EK 05 2	1/4 SAE	1.7	2.1	2.3	2.2	1.5	3.0																								
EK 05 2 S	1/4 ODF	2.7	3.3	3.6	3.5	2.4	4.6																								
EK 05 3 MF	3/8 Male/3/8 Fem SAE	2.9	3.5	3.8	3.7	2.5	4.9																								
EK 05 3	3/8 SAE	2.9	3.5	3.8	3.7	2.5	4.9																								
EK 05 3 S	3/8 ODF	3.6	4.4	4.8	4.7	3.2	6.2																								
EK 08 2 FM	1/4 Fem/1/4 Male SAE	1.9	2.3	2.5	2.4	1.7	3.2	274	240	237	218	235	200	195	155	159	118	224	217	245	217	163	180								
EK 08 2 MF	1/4 Male/1/4 Fem SAE	1.9	2.3	2.5	2.4	1.7	3.2																								
EK 08 2	1/4 SAE	1.9	2.3	2.5	2.4	1.7	3.2																								
EK 08 2 S	1/4 ODF	2.5	3.1	3.4	3.3	2.2	4.4																								
EK 08 25 S	5/16 ODF	2.9	3.5	3.8	3.7	2.5	4.9																								
EK 08 3 MF	3/8 Male/3/8 Fem SAE	3.3	4.0	4.3	4.3	2.9	5.5																								
EK 08 3	3/8 SAE	3.3	4.0	4.3	4.3	2.9	5.5																								
EK 08 3 S	3/8 ODF	3.7	4.5	4.9	4.8	3.3	6.3																								
EK 08 4	1/2 SAE	5.5	6.7	7.3	7.1	4.9	9.4																								
EK 08 4 S	1/2 ODF	5.8	7.1	7.7	7.5	5.1	9.9																								
EK 16 2 MF	1/4 Male/1/4 Fem SAE	1.9	2.3	2.5	2.4	1.7	3.2	347	301	371	341	368	313	305	240	206	186	350	340	306	272	260	286								
EK 16 2	1/4 SAE	1.9	2.3	2.5	2.4	1.7	3.2																								
EK 16 2 S	1/4 ODF	2.5	3.1	3.4	3.3	2.2	4.4																								
EK 16 25 S	5/16 ODF	2.5	3.1	3.4	3.3	2.2	4.4																								
EK 16 3	3/8 SAE	3.2	3.9	4.2	4.1	2.8	5.4																								
EK 16 3 S	3/8 ODF	3.6	4.4	4.8	4.7	3.2	6.2																								
EK 16 4	1/2 SAE	5	6.1	6.6	6.5	4.2	10.1																								
EK 16 4 S	1/2 ODF	7.0	8.5	9.2	9.0	6.2	11.9																								
EK 16 5	5/8 SAE	8.0	9.7	10.5	10.3	7.0	13.5																								
EK 16 5 S	5/8 ODF	8.3	10.1	10.9	10.7	7.3	14.1																								
EK 16 7 S	7/8 ODF	12.7	15.5	16.8	16.5	11.2	21.7																								
EK 30 3	3/8 SAE	3.5	4.3	4.7	4.6	3.1	6.1	601	526	664	611	657	561	548	434	515	355	627	608	536	477	458	504								
EK 30 3 S	3/8 ODF	5.2	6.3	6.8	6.7	4.6	8.8																								
EK 30 4	1/2 SAE	6.6	8.1	8.8	8.6	5.9	11.4																								
EK 30 4 S	1/2 ODF	8.2	10.0	10.8	10.6	7.2	13.9																								
EK 30 5	5/8 SAE	8.7	10.6	11.5	11.3	7.7	14.8																								
EK 30 6 S	3/4 ODF	12.1	14.8	16.0	15.7	10.7	20.6																								
EK 30 7 S	7/8 ODF	13.8	16.8	18.2	17.9	12.2	23.5																								
EK 30 9 S	1 1/8 ODF	16.1	19.6	21.2	20.8	14.2	27.3																								
EK 41 3	3/8 SAE	3.5	4.3	4.7	4.6	3.1	6.1	1104	971	938	854	919	785	765	607	715	465	876	850	991	884	638	702								
EK 41 4	1/2 SAE	8.5	10.4	11.3	11.1	7.5	14.6																								
EK 41 4 S	1/2 ODF	8.9	10.8	11.7	11.5	7.8	15.1																								
EK 41 5	5/8 SAE	9.8	12.0	13.0	12.8	8.7	16.8																								
EK 41 7 S	7/8 ODF	16.6	20.3	22.0	21.6	14.7	28.4																								
EK 41 9 S	1 1/8 ODF	22.7	27.7	30.0	29.4	20.1	38.7																								
EK 75 7 S	7/8 ODF	18.2	22.2	24.1	23.6	16.1	31.1	2368	2159	2159	2019	2159	1880	1810	1460	1460	1111	2019	2019	2229	2019	1578	1737								
EK 75 9 S	1 1/8 ODF	26.8	32.7	35.4	34.8	23.7	45.7																								

¹ All ratings in accordance with ARI Standard 710-04. 86°F liquid refrigerant temperature
 5°F saturated vapor temperature
 3.1 lbs./min./ton for R-134a
 2.9 lbs./min./ton for R-22 and R-407C
 4.0 lbs./min./ton for R-404A/507 and R-12
 2.7 lbs./min./ton for R-410A

² Water Capacities are based on:
 Equilibrium Point Dryness (EPD) of:
 50 parts per million for R-134a, R404-A/507,
 R-410A, R-407C, and R-744
 60 parts per million for R-22
 15 parts per million for R-12

³ 20 drops of water = 1 gram = 1 cc

⁴ For 2 PSI ΔP, Multiply values by 1.4

⁵ Since there is currently no ARI standard for R-744, values are based on 1 ton of refrigeration at 20°F liquid refrigerant temperature and -20°F saturated vapor temperature.

Liquid Refrigerant Holding Capacity-Ounces

Unit Size	R-12		R-134a		R-22		R-407C		R-410A		R-404A/R-507		R-502		R-744	
	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	20°F	-20°F
03	2.9	2.6	2.6	2.3	2.6	2.3	2.5	2.1	2.3	1.9	2.3	1.9	2.7	2.3	2.1	2.3
05	6.5	5.9	6.0	5.4	5.9	5.3	5.6	4.9	5.3	4.4	5.2	4.4	6.0	5.3	4.8	5.3
08	8.3	7.6	7.6	6.9	7.5	6.8	7.2	6.3	6.7	5.7	6.6	5.6	7.7	6.8	6.1	6.7
16	10.2	9.4	9.4	8.6	9.3	8.4	8.9	7.8	8.3	7.0	8.2	6.9	9.5	8.4	7.5	8.3
30	28.7	26.3	26.4	23.9	26.1	23.5	24.9	21.9	23.3	19.6	22.9	19.4	26.7	23.4	21.1	23.4
41	40.0	36.4	36.9	33.1	36.4	32.5	34.7	30.3	32.5	27.2	31.9	26.8	37.2	32.4	29.2	32.4
75	72.4	66.3	66.7	60.3	65.8	59.2	62.8	55.2	58.7	49.5	57.7	48.9	67.2	59.0	53.1	58.9