


PowerPEX™

Water Heater Connector

FIP Straight

- Full flow, dielectric fitting – no restriction
- Brass FIP swivel nut includes gasket
- Fitting with 600 WOG full port ball valve available
- 3/4" FIP branch for 2 gallon expansion tank
- Lead-free solder joint
- Made from Type L copper tube

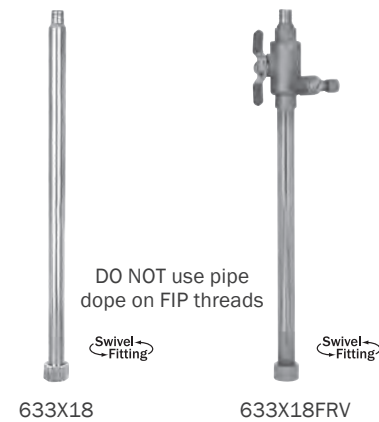

SUPPLY
DRAINAGE
SUPPORT
APPENDIX

Item No	Connection	Length	Ball Valve	NO LEAD	Pkg	Min Qty	Case Qty
NEW 633XG18FP	3/4" F1807 × 3/4" FIP swivel	18"	✓	✓	B	10	10
633X02	3/4" F1807 × 3/4" FIP swivel	2"		✓	B	25	25
633X02PK	3/4" F1807 × 3/4" FIP swivel	2"		✓	C*	6	6
633X18	3/4" F1807 × 3/4" FIP swivel	18"		✓	B	25	25
633X18PK	3/4" F1807 × 3/4" FIP swivel	18"		✓	C*	25	25
633X418	3/4" F1807 × 1" FIP swivel	18"		✓	B	25	25
633X18FP	3/4" F1807 × 3/4" FIP swivel	18"	✓		B	25	25
633X418FP	3/4" F1807 × 1" FIP swivel	18"	✓		B	25	25
633X18FPT	3/4" F1807 × 3/4" FIP swivel, with 3/4" FIP branch	18"	✓		B	20	20
633X18FRV	3/4" F1807 × 3/4" FIP swivel, with pressure relief 3/8" O.D. compression	18"	✓		B	10	10
633X306FP	3/4" F1807 × 3/4" FIP swivel	6"	✓		B	10	10
633XB02	3/4" F1807 × 3/4" FIP swivel brass	2"		✓	B	25	25