

TOILET/DISHWASHER OUTLET BOX

» 696 SERIES

OxBox™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 696 series OxBox™ with 3/8" compression outlet connection shall be used where necessary in plumbing supply systems. Unit shall accommodate supply lines from above and below. Unit shall be available with or without water hammer arrester. Arrester shall be certified to ASSE 1010 and shall be UPC listed. Outlet box shall include mounting tabs to secure directly to studs. Each unit shall include a galvanized bracket and debris cover.

INSTALLATION

Use mounting tabs to install box directly to stud. For installations between studs, insert bracket through channel on box. Secure bracket to structure and box to bracket with screws.

MATERIALS

Outlet box: ABS (white)

Frame: ABS (white)

Valve body: chrome-plated forged brass

Arrester clip/valve platform: ABS (white)

Arrester body: stainless steel

Piston: glass-filled polypropylene with two EPDM o-rings

Bracket: galvanized steel, 18-ga.

CERTIFICATIONS/APPROVALS

NSF-372 compliant, IAPMO listed

Valves meet ASME A112.18.1

VALVE/ARRESTER WORKING LIMITS


Working temperature: 250°F

Testing air pressure: 100 PSIG


Working/testing water pressure: 250 PSIG

DIMENSIONS

A: Frame width	5 3/4"	E: Rough-in box inner width	4"	I: Outlet connections	3/8" compression
B: Frame height	7 1/4"	F: Rough-in box overall depth	3 1/2"	J: Bracket length	18"
C: Frame opening width	3 5/8"	G: Rough-in box inner height	5 1/2"	K: Bracket width	5/8"
D: Frame opening height	5 1/8"	H: Supply connections	1/2" nom.		

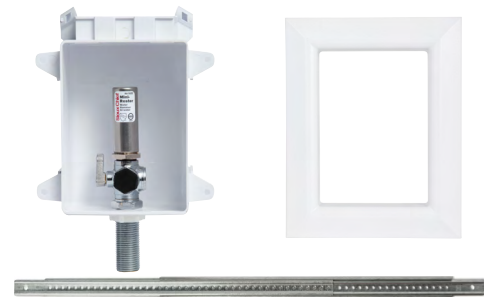

696-1011MF

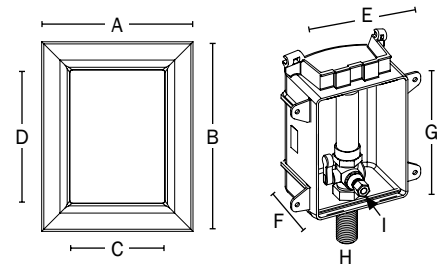

Create Item Number

696-G10ABC

e.g. 696-G1011MF: toilet/dishwasher supply box with no lead FSWT valves with arrester and frame

ARRESTER **A**

01 = no arrester
11 = with arrester

SUPPLY CONNECTION **B**

A = 1/2" PEX F2080 Lock™
C = 1/2" male CPVC
M = 1/2" female sweat
V = 1/2" Viega PureFlow® PEX
W = 1/2" PEX F1960 Grip™
X = 1/2" PEX F1807 Crimp™

FRAME PACKAGING **C**

F = standard pack (supply box, frame, bracket, debris cover)
R = rough-in pack (supply box, bracket, debris cover)

Available separately:
Frame only: 696-1F