


1 □
 200 AMP
 LEVER
 BYPASS
 SOCKETS

Lever Bypass Single Position

200 Amps | 7 Terminals | Ringless



U4701-RL-QG

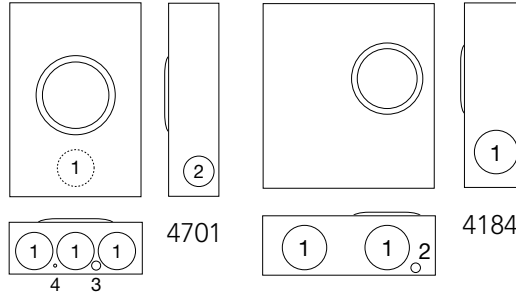

U4184-X

200 Amps | 7 Terminals | Ringless | Lever Bypass | Single Position

Catalog Number	Terminals	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U4701-RL-QG	7	OH	H.O.	#6-350	#6-350	Lever	4 ⁷ / ₈	13	19	3	2 ¹ / ₂	1/4, 1/2	1/4
U4184-X	7	UG	C.P.	#6-350	#6-350	Lever	6	18	19 ¹ / ₄	3	1/4, 1/2	—	—

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Lever Bypass:** The lever supplies clamping action and operates bypass device.
- **Connectors:** Extruded aluminum connectors are tin plated.
- **Isolated Neutral:** For field-installed isolated neutral for the **U4701**, order **K1047**.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.