

ProPress® Zero Lead Bronze Check Valve Model 2974ZL*

Description

- Zero Lead Bronze Body
- ProPress Ends
- Spring Check
- EPDM Seals
- .5 psi Cracking Pressure

Features

- Low Pressure Loss
- Silent Operation
- Stainless Steel Spring
- POM Check
- Smart Connect® feature
- ZERO LEAD.

Ratings



- 400 WOG
- Max. Operating Pressure: 200 psi
- Temperature Range: 0°F - 200°F

Approvals

- Conforms to MSS SP-80
- NSF-61 Annex G
- Conforms to California AB 1953 and Vermont Act 193



Pressure Drop

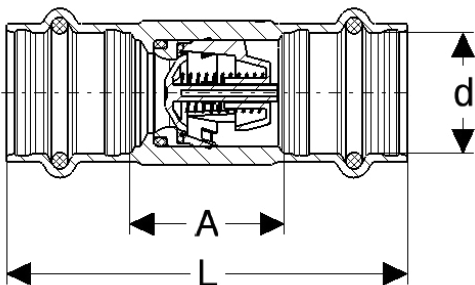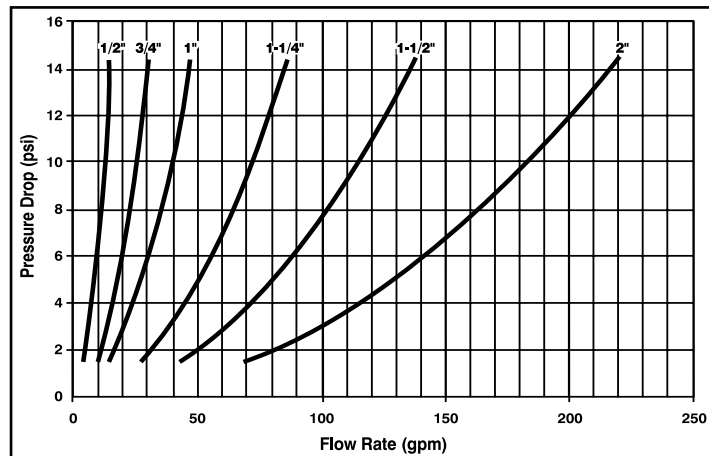

Part No	d	A (in)	L (in)	Wt (lbs)
79035	1/2"	0.87	2.52	0.17
79040	3/4"	1.14	2.95	0.28
79045	1"	1.34	3.15	0.42
79050	1 1/4"	1.69	3.74	0.60
79055	1 1/2"	2.09	4.92	0.96
79060	2"	2.56	5.71	1.87

*ZERO LEAD identifies Viega products meeting the lead free requirements of California and Vermont law, effective January 1, 2010, as tested and listed against NSF- 61, Annex G

Viega... The global leader in plumbing, heating and pipe joining systems

301 N. Main, 9th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618 • www.viega.com