



Standard Duty Float Valves

Standard Duty Valves

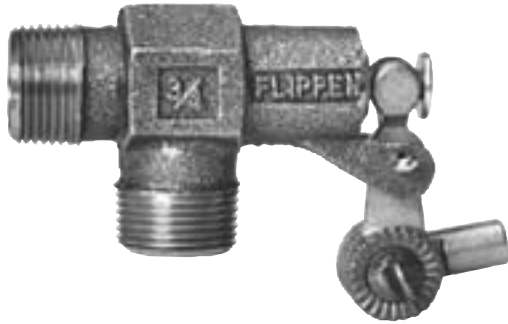

**3/8" - 1"
Threaded Outlet**

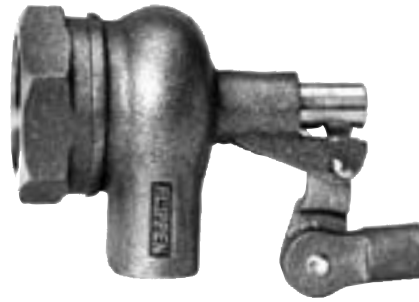

**1 1/4" - 2"
Non-Threaded Outlet**

Standard Duty

3/8" through 1" Bronze body with MNPT threaded inlet and outlet,
1 1/4" through 2" Bronze body with female NPT inlet-open outlet.
Cotter pin pivot arm assembly. Replaceable plungers.

Maximum Pressure - 125psi • Maximum Temperature 180°F

Model	Pipe Size	Stem Fitting	Inner Pack	Master Pack	Weight each (oz.)
ST375	3/8"	1/4-20	10	40	9.8
ST500	1/2"	1/4-20	10	40	10.5
ST750	3/4"	1/4-20	10	40	13.2
ST1000	1"	1/4-20	5	10	17.5
ST1250	1 1/4"	3/8-16	5	10	50.5
ST1500	1 1/2"	3/8-16	5	10	50.2
ST2000	2"	3/8-16	5	10	50.8

NOTE: See pages 5 and 6 for stems, floats and adapters.

Flow Specifications

Model	Size Inches	INLET PRESSURE -psi								
		5	15	25	35	55	65	85	105	125
		GPM								
ST375	3/8	5.7	11.5	14.2	16.0	19.0	20.5	23.0	25.0	27.0
ST500	1/2	7.0	12.5	15.5	17.2	21.0	22.5	24.7	27.0	29.0
ST750	3/4	12.0	21.0	27.5	30.5	37.7	41.0	46.5	48.0	53.0
ST1000	1	25.0	38.0	60.0	64.0	70.0	74.0	82.5	90.0	97.0
ST1250	1 1/4	64.0	90.0	110.0	129	158	170	192	214	233
ST1500	1 1/2	64.0	90.0	110.0	129	158	170	192	214	233
ST2000	2	64.0	90.0	110.0	129	158	170	192	214	233