


REV	DATE	NOTES
A	8/21/17	Initial Release

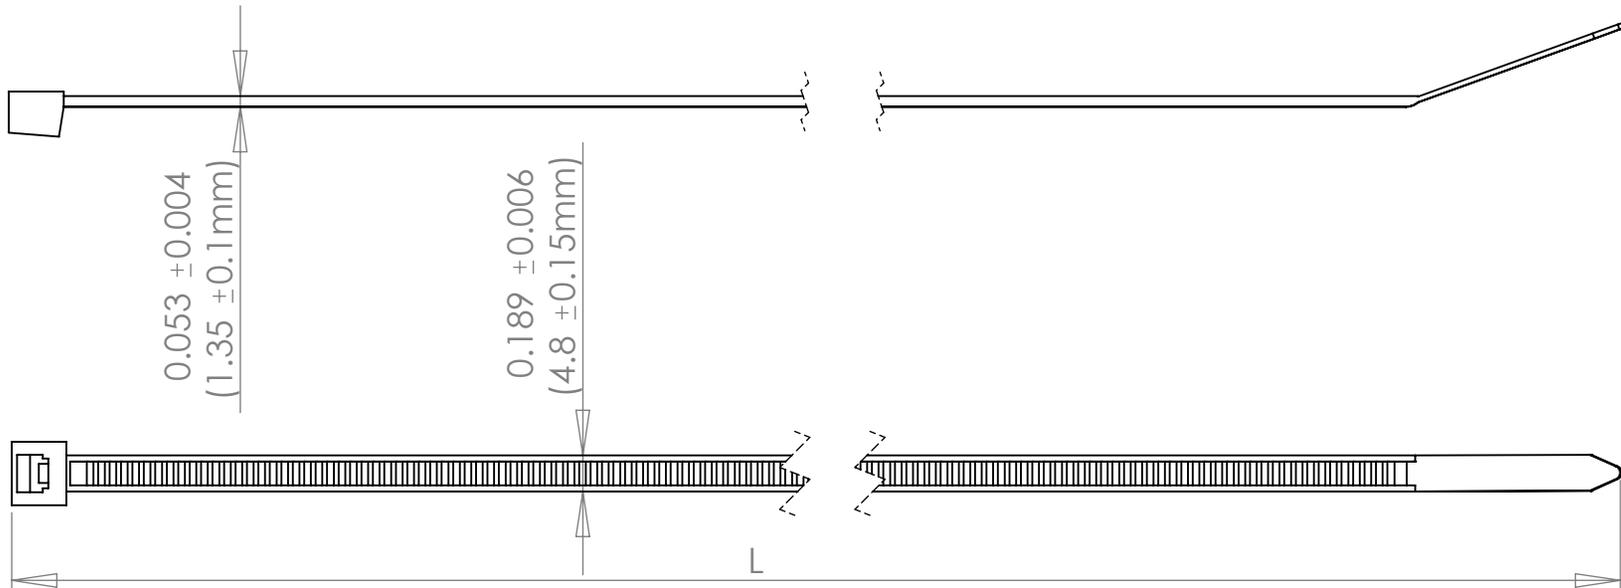

Model Number	Approx Length "L"	Min Bundle Diameter	Max Bundle Diameter
CT8-75	8" (200mm)	0.12" (3mm)	1.97" (50mm)
CT11-75	11" (280mm)		2.76" (70mm)
CT14-75	14" (360mm)		4.02" (102mm)

\*Suffix "-9" indicates Natural and "-0W" indicates UV Black

\*See Cambridge Catalog for Packaging Options and Designations

Notes:

1. Minimum Loop Tensile Strength: 75lb (334N)
2. Operating Temperature: -40°F to 185°F (-40°C to 85°C)
3. Minimum Installation Temperature: -4°F (-20°C)
4. UV Black ties are rated for outdoor use per ANSI/UL 62275
5. Usage Recommendations: The cable ties must be stored at room temperature in at least 50% humidity (recommended 80%RH) in a completely sealed polyethylene bag if not being used. In extreme heat and cold, limit the exposure of unused cable ties. If after being exposed to extreme temperatures and/or extreme relative humidities, the cable ties must be allowed to be stored at room temperature and at least 50% humidity (recommended 80%RH) for at least 24 hrs in a sealed bag before being used again

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **CAMBRIDGE RESOURCES**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **CAMBRIDGE RESOURCES** IS PROHIBITED.

NAME		DATE	<b>CAMBRIDGE</b> 960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403	
DRAWN	RH	8/21/17		
UNLESS OTHERWISE SPECIFIED:			TITLE:	
DIMENSIONS ARE IN INCHES [ ] DENOTES MILLIMETER			Cambridge Cable Ties 75lb Tensile Strength	
MATERIAL		SIZE	DWG. NO.	REV
Nylon 6,6 94V-2		<b>A</b>	CT-75 Rev A	<b>A</b>
DO NOT SCALE DRAWING			SHEET 1 OF 1	