

BRASS BALL VALVE FOR F1807 PEX

» 648 SERIES

PowerPEX®

SPECIFICATION

Sioux Chief 648 series no-lead brass ball valves for ASTM F1807 PEX connection shall be used where necessary in water supply systems. Valves shall be designed with ¼-Turn operation. Valve stem shall be blowout proof.

MATERIALS

Body: No-Lead Brass - DZR, SCC resistant

Seats: PTFE

Ball: Chrome-plated Brass

WORKING PRESSURE


600 WOG/PSI

Note: PEX connection specifications are limited to those called out in their respective ASTM standards for pipe and fittings.


DIMENSIONS

	½"	¾"	1"
A: Overall length	2.52"	2.62"	3.23"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

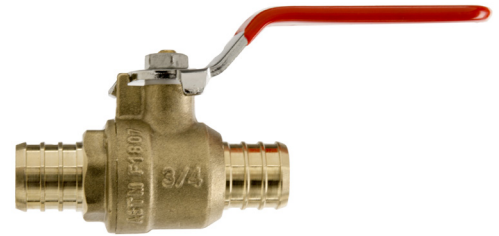

648XG3

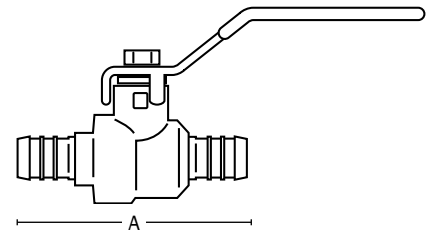

Create Item Number

648XGA

e.g. 648XG2: ½" F1807 ball valve

CONNECTION A

- 2 = ½" Valve - Standard Port
- 2FPD = ½" Valve with Drain
- 3 = ¾" Valve - Standard Port
- 3FPD = ¾" Valve with Drain
- 4 = 1" Valve - Standard Port
- 4FPD = 1" Valve with Drain