

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE — LBL LED wraparound provides a digital lighting platform to deliver general ambient lighting for surface-mount applications. The LED system delivers long life and excellent color to ensure a quality, low-maintenance lighting installation. Ideal for closets, storage rooms, hallways, and offices.

CONSTRUCTION — Metal parts are die formed from code-gauge steel. Prismatic diffuser is 100% acrylic with sonically welded luminous ends. Continuous side flanges on fixture body provide light trap and continuous diffuser support to prevent accidental opening and simplify maintenance.

Finish: Five-stage iron phosphate pretreatment assures superior paint adhesion and rust resistance.

Painted parts finished with high-gloss, high-reflectivity baked white polyester enamel (low VOC).

OPTICS — Curved prismatic diffuser with linear side prisms and highly transmissive overlay minimizes lamp image and provides high-angle brightness control. Luminous end plates soften appearance for improved aesthetics.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide extended service life. 90% LED lumen maintenance at 50,000 hours (L90/50,000).

LED drivers deliver dimming from 0-10V control signal.

LISTINGS — CSA certified to U.S. and Canadian standards. Damp listed.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Contractor Select

LBL LED Low-Profile Curved-Basket LED Wraparound

2' and 4'
LED




Specifications

Length: 24 (61.0)

48 (122.0)

Width: 10 (25.4)

Depth: 2-3/4 (7.0)




All dimensions are inches (centimeters) unless otherwise indicated.

MOUNTING DATA

Individual Installation —
Two single-stem hangers required.

Row Installation —
One hanger per fixture plus one row required.

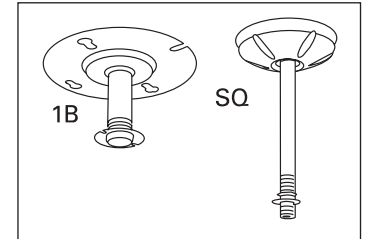

ORDERING INFORMATION

See LBL Configurable specification sheet for additional lumen packages and control options.

Catalog number	UPC	Description	Lumens	Color temperature	Lens type	Voltage	Wattage ²	Pallet qty	Standard carton qty.
LBL2 LP835 ¹	190887819380	2' LED Wraparound	2,014	3500 K	Patterned #12 acrylic	120-277	17	112	1
LBL2 LP840 ¹	190887819397	2' LED Wraparound	2,046	4000 K	Patterned #12 acrylic	120-277	17	112	1
LBL4 LP835 ¹	190887819199	4' LED Wraparound	4,188	3500 K	Patterned #12 acrylic	120-277	32	56	1
LBL4 LP840 ¹	190887819359	4' LED Wraparound	4,253	4000 K	Patterned #12 acrylic	120-277	32	56	1
LBL4 347 LP835	190887856682	4' LED Wraparound	4,188	3500 K	Patterned #12 acrylic	347	32	56	1
LBL4 347 LP840	190887856705	4' LED Wraparound	4,253	4000 K	Patterned #12 acrylic	347	32	56	1

Notes

- Product in stock.
- All values are design or typical values, measured under laboratory conditions at 25°C.

LBL-LED-WRAPAROUND