

# Rigid Conduit Bodies

## T Type - Form 7

### Features

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

### Applications

- Serves as pull outlet for conductors being installed

### Standard Material

- Gray iron


### Standard Finish

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids



E195124

UL 514A and UL 514B  
Fed. Spec A-A-50563  
NEMA FB 1

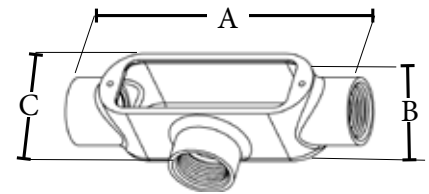

Catalog Number	UPC	Size	Wire Size		Internal Volume (in <sup>3</sup> )	Ship Case	Weight/Case	Inches		
			Max. Number	Max. Size				A	B	C
<b>T1G7</b>	86935	<b>1/2"</b>	---	---	3.8	10	8	5.30	2.50	1.80
<b>T2G7</b>	86936	<b>3/4"</b>	3	6 AWG	5.8	10	13	6.20	2.70	2
<b>T3G7</b>	86937	<b>1"</b>	3	4 AWG	9	5	9	7.30	3	2.30
<b>T4G7</b>	86938	<b>1-1/4"</b>	3	2 AWG	17.8	10	26	7.40	3.10	2.30
<b>T5G7</b>	86939	<b>1-1/2"</b>	3	2 AWG	24	10	32	8.20	3.40	2.60
<b>T6G7</b>	86940	<b>2"</b>	3	1/0 AWG	45	5	25	9.10	4	3.10
<b>T7G7</b>	86941	<b>2-1/2"</b>	3	2/0 AWG	95.8	1	8	12.40	5.80	3.70
<b>T8G7</b>	86942	<b>3"</b>	3	2/0 AWG	119	1	11	12.40	5.80	4.40
<b>T10G7</b>	86944	<b>4"</b>	3	250 MCM	231	1	18	14.50	7	5.40