



EZTR50 & EZTR75 Series Residential Condensing Tankless Water Heater Specification Sheet

- **Water Connection** - Top mount connections for easy water connections
- **Standard Input** - Gas consumption ranges from 18,000 BTU/h to 180,000 BTU/h (EZTR50) and 199,900 BTU/h (EZTR75)
- **Capacity Range** - Flow rates from 0.5 gpm up to 9.8 gpm (EZTR50) and 11.1 gpm (EZTR75)
- **Compact Design** - ANSI Z21.10.3/CSA 4.3 certified design that can be wall-mounted indoors or outdoors
- **Durable Steel Casing with Polyester Coating**
- **Heat Exchanger** - Both primary and secondary heat exchanger are manufactured with stainless steel 316L
- **Compatible with 1/2" gas pipe** - See installation manual
- **Venting Options** - Uses indoor 2" flexible polypropylene (included)
- **Direct Electronic Ignition**
- **Quick-Connect** - Two identical units can be linked together by using the optional Quick Connect Cord (#QC-2) for twice the hot water capacity
- **Uniform Energy Factor** - 0.96 (NG) 0.96 (LP)
- **Temperature Controls** - includes remote thermostat that can precisely adjust the output temperature from 100°F to 140°F with the capability to display temperatures in both °C and °F
- **Power Cord Installation Kit** - 6' power cord is included
- **Safety Devices** - Flame Sensor, Overheat Prevention Device, Lightning Protection Device, Freeze Protection, and High Limit Switch
- **Additional Features** - Temperature Lockout, High Elevation Adjustment, Condensate Overflow Monitoring System, Service Reminder Function, and Wifi Ready
- **25-Year* Limited Heat Exchanger Warranty for Residential Use**
- **5-Year Limited Parts Warranty & 1-Year Reasonable Labor**
- **Approvals** - CSA, UPC**, NSF, Low NOx Approved by SCAQMD [$<14\text{ng/J}$ or 20ppm]



Included in Package

- Unit (EZ98 / EZ111)
- Flex Vent 2" Conversion Kit (EZ2-CK)
- Isolator Valves (IK-WV-200)
- Flex Vent 2" Kit 25 Feet (EZ2FVK-1)

Optional accessory


- Flex Vent 2" Kit 35 Feet (EZ2FVK-2)
- Wireless Monitor (NWC-ADAPTER)



* Refer to the Noritz Limited Warranty for complete coverage details, at Noritz.com

** This product complies with California AB 1953 Low Lead Law and section 1417(d) of the Safe Drinking Water Act


Dimensions

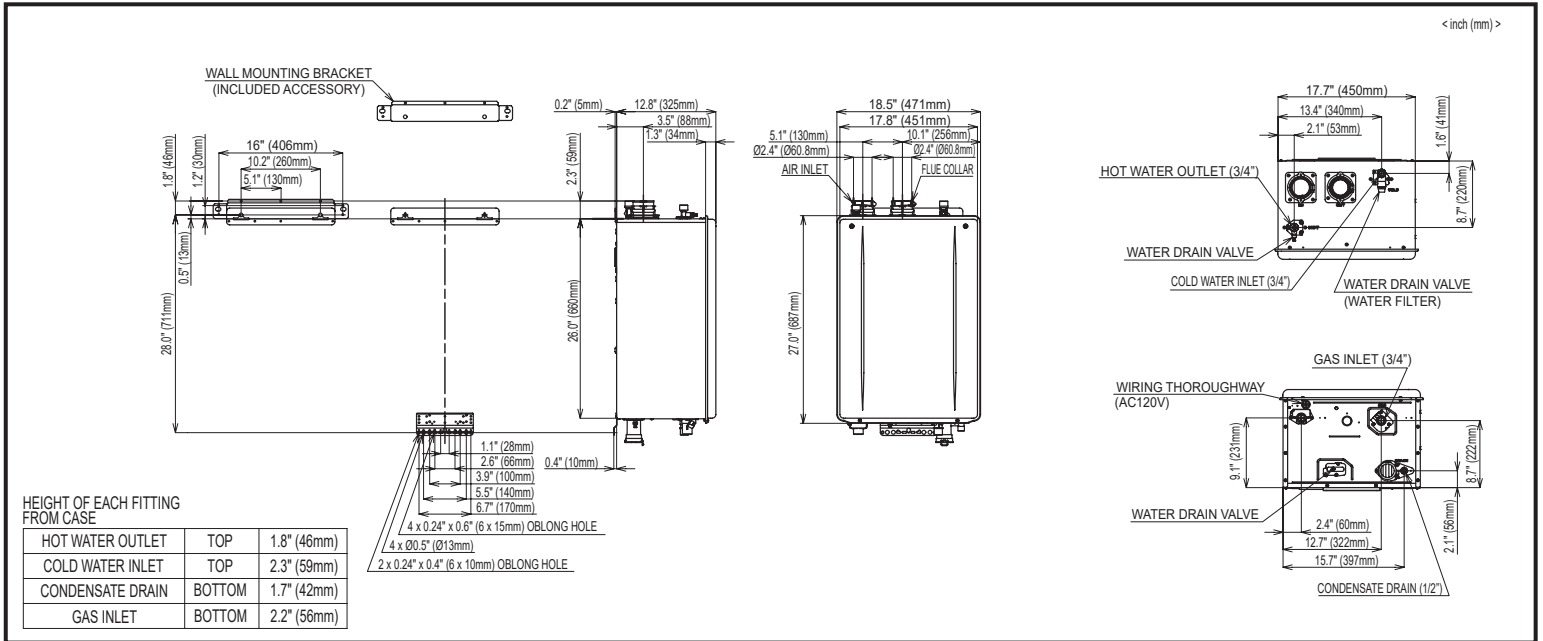

Flow Rates

Temperature Rise (°F)	30	40	45	50	60	70	80	90	100	110	120	130	140
EZTR75 (GPM)	11.1	9.8	8.7	7.8	6.5	5.6	4.9	4.4	3.9	3.6	3.3	3.0	2.8
EZTR50 (GPM)	9.8	8.6	7.6	6.9	5.7	4.9	4.4	3.8	3.4	3.1	2.9	2.6	2.4

Pressure Loss

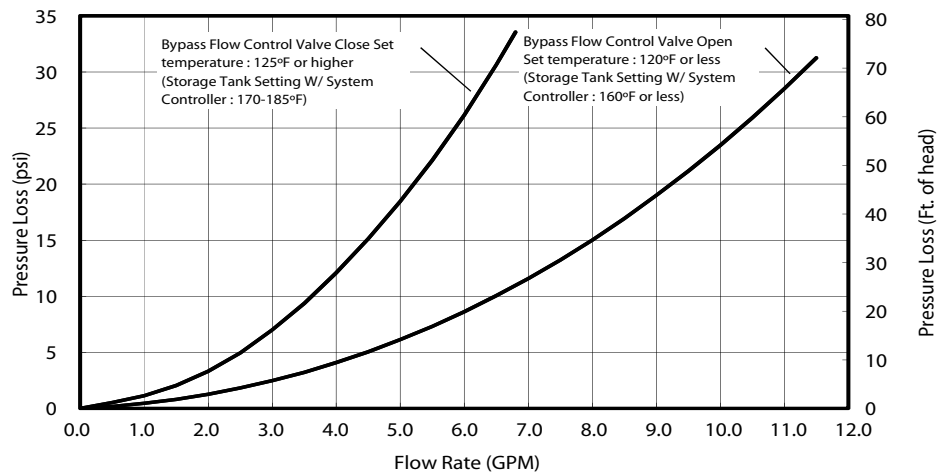

Specifications

Model Name		EZTR50 & EZTR75
Weight		81 pounds
Operating Pressure		15 - 150 psi
Gas Supply Pressure		NG: 4.0" - 10.5" LP: 8.0" - 14.0"
Water Holding Capacity		0.65 Gallon (2.5L)
Connection Sizes	Water Inlet	3/4"
	Hot Water Outlet	3/4"
	Gas Inlet	3/4"
	Condensate Drain	1/2" Threaded
Power	Supply	120VAC (60Hz), less than 4 amperes
	Consumption	NG: 90W LP: 98W Freeze Prevention 178W
Freeze Protection		Outdoor: -4°F Indoor: -30°F
Temperature Settings	°F Mode	100-140°F (In 5°F intervals) (9 Options)
	°C Mode	37-48°C (In 1°C intervals), 50-60°C (In 5°C intervals) (15 Options)
Default Temperature Options	°F Mode	120, 135, 140°F (Default is 120°F)
	°C Mode	50, 55, 60°C (Default is 50°C)